




F-470 BARE CODE 03011

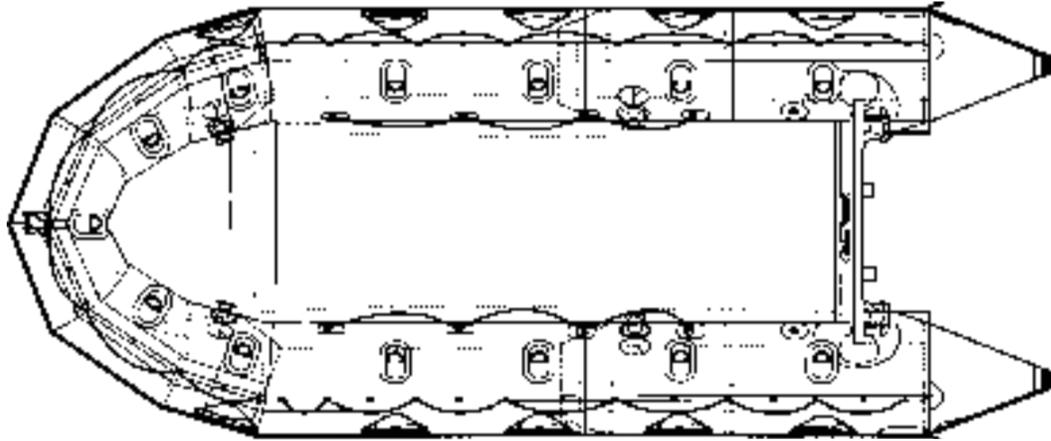

KEY FEATURES INCLUDE:

- > Removable Lower Speed Tubes
- > New and Improved Carry Handles
- > Velcro Mounted Keel

Specifications F470 BARE - Serie 03011 [Definition: Skin Only]

| | | |
|--|-----------------------|---------------|
| Overall Length | 4.70 m | 15' 5" |
| Overall Width | 1.90 m | 6' 3" |
| Inside Length | 3.40 m | 11' 2" |
| Inside Width | 0.90 m | 3' |
| Tube Diameter | 0.50 m | 20" |
| Passengers (maximum) | N/A | (bare boat) |
| Payload, Roll-up Floor (ALU) | N/A | (bare boat) |
| Payload, Hard Deck (ALU floorboard) | N/A | (bare boat) |
| Horsepower (max.), Roll-up Floor (ALU) | N/A | (bare boat) |
| Horsepower (max.), Hard Deck (ALU floorboards) | N/A | (bare boat) |
| Horsepower (max.), Twin Engines (ALU floorboards) | N/A | (bare boat) |
| Weight, boat without roll-up floor | 92 kg | 203 lbs |
| Weight, compressed gas bottle (indicative) | N/A | (bare boat) |
| Boat Volume (air) | 1,896 cu. l. | 67.0 cu. ft. |
| Folded Dimensions, without roll-up floor (approx.) | 500 mm x 1400 mm | 1' 8" x 4' 7" |
| Number of Airtight Chambers | 5 MBT + 2 LBT + 1 KBT | Total 8 |

Tolerances of Weights and Measures: +/- 5%


All engines must be through-bolted through the transom.

When lifting personnel in a boat, only certified lifting slings should be used and should be recertified yearly.

Zodiac of North America, Inc. Professional Products Division
Main Office: Maryland Tel: (410) 643-4141 Fax: (410) 604-0161
West Coast Office: California Tel: (619) 596-7421 Fax: (619) 596-7426



F-470 ALL-UP CODE 03012

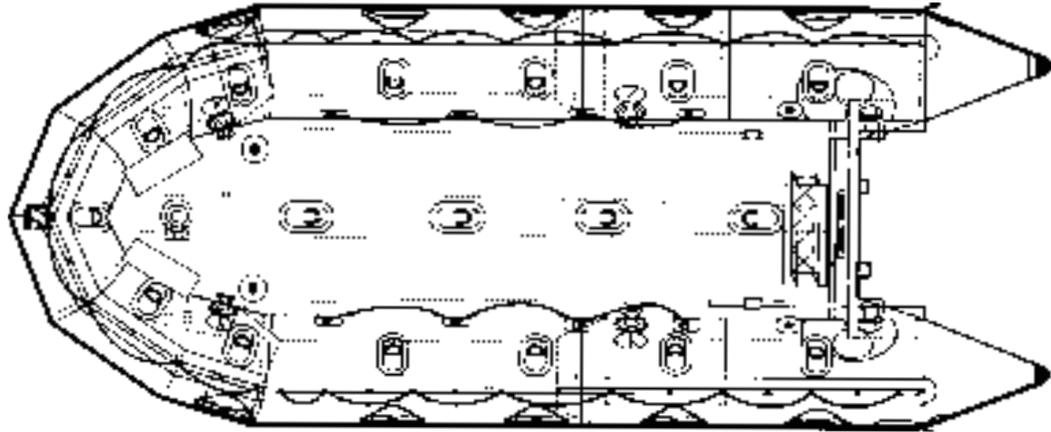

KEY FEATURES INCLUDE:

- > Removable Lower Speed Tubes
- > New and Improved Carry Handles
- > Velcro Mounted Keel
- > New and Improved Isolator Clamps
- > Mirada Overpressure Valves
- > Roll-Up Floor
- > Straight Transom for Long Shaft Outboards
- > Repair Kit
- > Quick-Release Mounted Paddle Bag
- > Removable Bow Pouch

Specifications F470 ALL-UP - Serie 03012 [Definition: Boat Complete]

| | | |
|---|---|--------------------|
| Overall Length | 4.70 m | 15' 5" |
| Overall Width | 1.90 m | 6' 3" |
| Inside Length | 3.40 m | 11' 2" |
| Inside Width | 0.90 m | 3' |
| Tube Diameter | 0.50 m | 20" |
| Passengers (maximum) | 6/8/10 | 6/8/10 |
| Payload, Roll-up Floor (ALU) | 1,000 kg | 2,205 lbs |
| Payload, Hard Deck (ALU floorboard) | 1,300 kg | 2,866 lbs |
| Horsepower (max.), Roll-up Floor (ALU) | 40 hp, long shaft | 40 hp, long shaft |
| Horsepower (max.), Hard Deck (ALU floorboards) | 65 hp, long shaft | 65 hp, long shaft |
| Horsepower (max.), Twin Engines (ALU floorboards) | 2 x 35 hp, long shaft 2 x 35 hp, long shaft | |
| Weight, boat with roll-up floor | 134 kg | 295 lbs |
| Weight, compressed gas bottle (indicative) | 20 kg | 45 lbs |
| Boat Volume (air) | 1,896 l. cu. | 67.0 cu. ft. |
| Folded Dimensions, with roll-up floor (approx.) | 0.85 m x 1.50 m | 2' 9-1/2" x 4' 11" |
| Number of Airtight Chambers | 5 MBT + 2 LBT + 1 KBT | Total 8 |

Tolerances of Weights and Measures: +/- 5%

All engines must be through-bolted through the transom.

When lifting personnel in a boat, only certified lifting slings should be used and should be recertified yearly.

Zodiac of North America, Inc. Professional Products Division
Main Office: Maryland Tel: (410) 643-4141 Fax: (410) 604-0161
West Coast Office: California Tel: (619) 596-7421 Fax: (619) 596-7426